


REV	DESCRIPTION	DATE	PREP	APPD
D	CO-28745	1/31/18	DF/SM	LT



MOUNT HOLLY SPRINGS, PA 17065

## Oscillator Specification, Hybrid Clock

For

Hi-Rel Standard, High Frequency CMOS

THE RECORD OF APPROVAL FOR THIS DOCUMENT IS MAINTAINED ELECTRONICALLY WITHIN THE ERP SYSTEM

CODE IDENT NO	SIZE	DWG. NO.	REV
<b>00136</b>	<b>A</b>	DOC204900	D

UNSPECIFIED TOLERANCES: N/A

SHEET 1 OF 20

## 1. SCOPE

- 1.1 General. This specification defines the design, assembly and functional evaluation of high reliability, hybrid clock oscillators produced by Vectron International. Devices delivered to this specification represent the standardized Parts, Materials and Processes (PMP) Program developed, implemented and certified for advanced applications and extended environments.
- 1.2 Applications Overview. The designs represented by these products were primarily developed for the MIL-Aerospace community. The lesser Design Pedigrees and Screening Options imbedded within DOC204900 bridge the gap between Space and COTS hardware by providing custom hardware with measures of mechanical, assembly and reliability assurance needed for Military or Ruggedized COTS environments.

## 2. APPLICABLE DOCUMENTS

- 2.1 Specifications and Standards. The following specifications and standards form a part of this document to the extent specified herein. The issue currently in effect on the date of quotation will be the product baseline, unless otherwise specified. In the event of conflict between the texts of any references cited herein, the text of this document shall take precedence.

### Military

MIL-PRF-55310 Oscillators, Crystal Controlled, General Specification For  
MIL-PRF-38534 Hybrid Microcircuits, General Specification For

### Standards


MIL-STD-202 Test Method Standard, Electronic and Electrical Component Parts  
MIL-STD-883 Test Methods and Procedures for Microelectronics

### Other

DOC204951 Test Specification, High Frequency CMOS XO, Hi-Rel Standard  
QSP-90100 Quality Systems Manual, Vectron International  
DOC011627 Identification Common Documents, Materials and Processes, Hi-Rel XO  
DOC203982 DPA Specification  
QSP-91502 Procedure for Electrostatic Discharge Precautions

## 3. GENERAL REQUIREMENTS

- 3.1 Classification. All devices delivered to this specification are of hybrid technology conforming to Type 1, Class 2 of MIL-PRF-55310. Primarily developed as a Class S equivalent specification, options are imbedded within it to also produce Class B, Engineering Model and Ruggedized COTS devices. Devices carry a Class 2 ESDS classification per MIL-PRF-38534.
- 3.2 Item Identification. Unique model number series are utilized to identify device package configurations as listed in Table 1.
- 3.3 Absolute Maximum Ratings.  
a. Supply Voltage Range ( $V_{CC}$ ): -0.5Vdc to +7.0Vdc

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>2</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- b. Storage Temperature Range ( $T_{STG}$ ): -65°C to +125°C
- c. Junction Temperature ( $T_j$ ): +150°C
- d. Lead Temperature (soldering, 10 seconds): +300°C
- e. Output Source/Sink Current: ±50 mA

3.4 Design, Parts, Materials and Processes, Assembly, Inspection and Test.

3.4.1 Design. The ruggedized designs implemented for these devices are proven in military and space applications under extreme environments. Designs utilize 4-point crystal mounting in compliment with Established Reliability (MIL-ER) componentry. When specified, radiation lot acceptance testing up to 100krad(Si) (RHA level R) can be included without altering the device's internal topography.

3.4.1.1 Design and Configuration Stability. Barring changes to improve performance by reselecting passive chip component values to offset component tolerances, there will not be fundamental changes to the design or assembly or parts, materials and processes after first product delivery of that item without written approval from the procuring activity.

3.4.1.2 Environmental Integrity. Designs have passed the environmental qualification levels of MIL-PRF-55310. These designs have also passed extended dynamic levels of at least:


- a. Sine Vibration: MIL-STD-202, Method 204, Condition G (30g pk.)
- b. Random Vibration: MIL-STD-202, Method 214, Condition II-J (43.92g rms, three minute duration in each of three mutually perpendicular directions)
- c. Mechanical Shock: MIL-STD-202, Method 213, Condition F (1500g, 0.5ms)

3.4.2 Prohibited Parts, Materials and Processes. The items listed are prohibited for use in high reliability devices produced to this specification.

- a. Gold metallization of package elements without a barrier metal.
- b. Zinc chromate as a finish.
- c. Cadmium, zinc, or pure tin external or internal to the device.
- d. Plastic encapsulated semiconductor devices.
- e. Ultrasonically cleaned electronic parts.
- f. Heterojunction Bipolar Transistor (HBT) technology.
- g. 'getter' materials

3.4.3 Assembly. Manufacturing utilizes standardized procedures, processes and verification methods to produce MIL-PRF-55310 Class S / MIL-PRF-38534 Class K equivalent devices. MIL-PRF-38534 Group B Option 1 in-line inspection is included on radiation hardened part numbers to further verify lot pedigree. Traceability of all components and production lots are in accordance with MIL-PRF-38534, as a minimum. Tabulated records are provided as a part of the deliverable data package. Devices are handled in accordance with Vectron document QSP-91502 (Procedure for Electrostatic Discharge Precautions).

3.4.4 Inspection. The inspection requirements of MIL-PRF-55310 apply to all devices delivered to this document. Inspection conditions and standards are documented in accordance with the Quality Assurance, ISO-9001 and AS9100 derived, System of QSP-90100.


SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>3</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- 3.4.5 Test. The Screening test matrix of Table 5 is tailored for selectable-combination testing to eliminate costs associated with the development/maintenance of device-specific documentation packages while maintaining performance integrity.
- 3.4.6 Marking. Device marking shall be in accordance with the requirements of MIL-PRF-55310.
- 3.4.7 Ruggedized COTS Design Implementation. Design Pedigree “D” devices (see ¶ 5.2) use the same robust designs found in the other device pedigrees. They do not include the provisions of traceability or the Class-qualified componentry noted in paragraphs 3.4.3 and 4.1.


4. DETAIL REQUIREMENTS

4.1 Components

- 4.1.1 Crystals. Cultured quartz crystal resonators are used to provide the selected frequency for the devices. The optional use of Premium Q swept quartz can, because of its processing to remove impurities, be specified to minimize frequency drift when operating in radiation environments. In accordance with MIL-PRF-55310, the manufacturer has a documented crystal element evaluation program.
- 4.1.2 Passive Components. Passive components will have the same pedigree as the die specified in paragraph 7.1. When required, Established Reliability (ER) failure level R minimum passive components are used to the maximum extent possible and are procured from QPL suppliers where possible. Lot evaluations are in accordance with MIL-PRF-38534 or Enhanced Element Evaluation as specified in Table 7. When used, inductors may be open construction and may use up to 46 gauge wire.
- 4.1.3 Class S Active Devices. Devices are assembled with bipolar semiconductors and an ACMOS chip used to provide the ACMOS output. The bipolar semiconductors are procured from wafer lots that have passed MIL-PRF-38534 Class K Lot Acceptance Tests for Class S devices. The ACMOS microcircuit die is sourced in accordance with Standard Microcircuit Drawing 5962R8754903V9A, Class V (MIL-PRF-38535) qualified device. All active devices are acceptable for use in environments of up to 100 krads total dose by design or Radiation Lot Acceptance Testing of the individual components. In addition, bipolar semiconductors are considered insensitive to Single Event Effects. SEE testing of the ACMOS device type has shown that it is SEL and SET/SEU free to  $>90\text{MeV}\cdot\text{cm}^2/\text{mg}$ .
- 4.1.3.1 Class B Active Devices. Active devices for design Pedigree letters “B” and “C” are procured from wafer lots that have passed MIL-PRF-55310 element evaluations for Class B devices, at a minimum.
- 4.1.4 Packages. Packages are procured that meet the construction, lead materials and finishes as specified in MIL-PRF-55310. All leads are Kovar with gold plating over a nickel underplate. Package lots are upscreened in accordance with the requirements of MIL-PRF-38534 as applicable.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>4</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- 4.1.5 Traceability and Homogeneity. All design pedigrees except option D have active device lots are homogenous and traceable to the manufacturer’s individual wafer; all other elements and materials are traceable to their manufacturer and incoming inspection lots. Design pedigrees E, R, V and X have homogenous material. In addition, swept quartz crystals are traceable to the quartz bar and the processing details of the autoclave lot, as applicable.
- 4.1.6 Enhanced Element Evaluation. When Design Pedigree Option “E” is specified, semiconductors and passive elements with Enhanced Element Evaluation as listed in Table 6 and 7 shall be implemented. Since the microcircuit used is from a lot that has been qualified to Standard Microcircuit Drawing 5962-87549, Class V (MIL-PRF-38535), additional element evaluation is not performed.
- 4.2 Mechanical.
- 4.2.1 Package Outline. Table 1 links each Hi-Rel Standard Model Number of this specification to a corresponding package style. Mechanical Outline information of each package style is found in the referenced Figure.
- 4.2.2 Thermal Characteristics. The calculated thermal resistance and resulting junction temperature rise is found in Table 4.
- 4.3 Electrical.
- 4.3.1 Input Power. Devices are available with an input voltage of either ~~designed for standard~~ +3.3 volt dc operation,  $\pm 10\%$  or +2.5 volt dc operation,  $\pm 5\%$ . Current is measured, no load, at maximum rated operating voltage.
- 4.3.2 Temperature Range. Operating range is  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .
- 4.3.3 Frequency Tolerance. Initial accuracy at  $+23^{\circ}\text{C}$  is  $\pm 15$  ppm maximum. Frequency-Temperature Stability is  $\pm 50$  ppm maximum from  $+23^{\circ}\text{C}$  reference. Frequency-Voltage Tolerance is  $\pm 4$  ppm maximum.
- 4.3.4 Frequency Aging. Aging limits, and when tested in accordance with MIL-PRF-55310 Group B inspection, shall not exceed  $\pm 1.5$  ppm the first 30 days,  $\pm 5$  ppm Year 1 and  $\pm 2$  ppm per year thereafter.
- 4.3.4.1 Frequency Aging Duration Option. By customer request, the Aging test may be terminated after 15 days if the measured aging rate is less than half of the specified aging rate. This is a common method of expediting 30-Day Aging without incurring risk to the hardware and used quite successfully for numerous customers. It is based on the ‘least squares fit’ determinations of MIL-PRF-55310 paragraph 4.8.35. The ‘half the time/half the spec’ limit is generally conservative as roughly 2/3 of a unit’s Aging deviation occurs within that period of time. Vectron’s automated aging systems take about 6 data points per day, so a lot of data is available to do very accurate projections, much more data than what is required by MIL-PRF-55310. The delivered data would include the Aging plots projected to 30 days. If the units would not perform within that limit then they would continue to full 30 Day term. Please

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>5</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

advise by purchase order text if this may be an acceptable option to exercise as it assists in Production Test planning.

- 4.3.5 Operating Characteristics. Symmetrical square wave limits are dependent on the device frequency and are in accordance with Tables 2 and 2A. Waveform measurement points and logic limits are in accordance with MIL-PRF-55310. Start-up time is 10.0 msec. maximum.
- 4.3.6 Output Load. ACMOS (12MHz to 126MHz = 10kΩ, 15pF, > 126MHz to 160MHz = 10kΩ, 10pF). Test load configurations are in accordance with MIL-PRF-55310.

5. QUALITY ASSURANCE PROVISIONS AND VERIFICATION

5.1 Verification and Test. Device lots shall be tested prior to delivery in accordance with the applicable Screening Option letter as stated by the 15<sup>th</sup> character of the part number. Table 5 tests are conducted in the order shown and annotated on the appropriate process travelers and data sheets of the governing test procedure. For devices that require Screening Options that include MIL-PRF-55310 Group A testing, the Post-Burn-In Electrical Test and the Group A Electrical Test are combined into one operation.

5.1.1 Screening Options. The Screening Options, by letter, are summarized as:

- A Modified MIL-PRF-38534 Class K
- B Modified MIL-PRF-55310 Class B Screening & Group A Quality Conformance Inspection (QCI)
- C Modified MIL-PRF-55310 Class S Screening & Group A QCI
- D Modified MIL-PRF-38534 Class K with Group B Aging
- E Modified MIL-PRF-55310 Class B Screening, Groups A & B QCI
- F Modified MIL-PRF-55310 Class S Screening, Groups A & B QCI
- G Modified MIL-PRF-55310 Class B Screening & Post Burn-in Nominal Electricals
- X Engineering Model (EM)

5.2 Optional Design, Test and Data Parameters. The following is a list of design, assembly, inspection and test options that can be selected or added by purchase order request.

- a. Design Pedigree (choose one as the 5<sup>th</sup> character in the part number):
  - (E) Enhanced Element Evaluation, 100krad Class S die, Premium Q Swept Quartz
  - (R) Hi-Rel design w/ 100krad Class S die, Premium Q Swept Quartz
  - (V) Hi-Rel design w/ 100krad Class S die, Non-Swept Quartz
  - (X) Hi-Rel design w/ Non-Swept Quartz, Class S die
  - (B) Hi-Rel design w/ Swept Quartz, Class B die
  - (C) Hi-Rel design w/ Non-Swept Quartz, Class B die
  - (D) Hi-Rel design w/ Non-Swept Quartz and commercial grade components
- b. Input Voltage, (B) for +3.3V as the 14<sup>th</sup> character
- c. Frequency-Temperature Slew Test
- d. Radiographic Inspection
- e. Group C Inspection: In accordance with MIL-PRF-55310, Table VII (requires 8 destruct specimens)

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>6</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- f. Group C Inspection: In accordance with MIL-PRF-38534, Table C-Xc, Condition PI (requires 8 destruct specimens – 5 pc. Life, 3 pc. RGA) Subgroup 1 fine leak test to be performed per MIL-STD-202, Method 112, Test Condition C.
- g. Qualification: In accordance with EEE-INST-002, Section C4, Table 3, Level 1 or 2 (requires 11 destruct specimens)
- h. Internal Water-Vapor Content (RGA) samples and test performance
- i. MTBF Reliability Calculations
- j. Worst Case/Derating Analysis: MIL-HDBK-1547 with  $T_j \text{ Max} = +105^\circ\text{C}$ ; Derated Maximum Operating Temp =  $T_j \text{ Max} - \Delta T_j$
- k. Deliverable Process Identification Documentation (PID)
- l. Customer Source Inspection (pre-crystal mount pre-cap, post-crystal mount pre-cap and final). Due to components being mounted underneath the crystal blank, pre-crystal mount pre-cap inspection should be considered.
- m. Destruct Physical Analysis (DPA): MIL-STD-1580 with exceptions as specified in Vectron DOC203982.
- n. Qualification: In accordance with MIL-PRF-55310, Table IV (requires 11 destruct specimens).
- o. High Resolution Digital Pre-Cap Photographs (20 Megapixels minimum)
- p. Hot solder dip of leads with Sn63/Pb37 solder prior to shipping.


5.2.1 NASA EEE-INST-002. A combination of Design Pedigree E or R, Option F Screening, Group C Inspection in accordance with Table VII of MIL-PRF-55310 and RGA, meet the requirements of Level 1 device reliability. A combination of Design Pedigree B, Option E Screening, Radiographic Inspection, Group C Inspection in accordance with Table VII of MIL-PRF-55310 and RGA, meet the requirements of Level 2 device reliability.

5.3 Test Conditions. Unless otherwise stated herein, inspections are performed in accordance with those specified in MIL-PRF-55310 and MIL-PRF-38534, in that order. Process travelers identify the applicable methods, conditions and procedures to be used. Examples of electrical test procedures that correspond to MIL-PRF-55310 requirements are shown in Table 3.

5.4 Special Test and Description.

5.4.1 Frequency-Temperature Slew. Frequency-Temperature Slew Test has been developed as an indicator of higher than normal internal water vapor content. The incremental temperature sweep from  $+125^\circ\text{C}$  to  $-55^\circ\text{C}$  and back to  $+125^\circ\text{C}$  records output frequency fluctuations emulating the mass loading of moisture deposited on the crystal blank surface. Though not replacing a customer's internal water-vapor content (RGA) requirement, confidence is increased without destructively testing otherwise good devices.

- 5.5 Deliverable Data. The manufacturer supplies the following data, as a minimum, with each lot of devices:
- a. Completed assembly and screening lot travelers, including rework history and Certificate of Conformance.
  - b. Electrical test variables data, identified by unique serial number.
  - c. Frequency-Temperature Slew plots, Radiographic films, Group C data and RGA data as required by purchase order.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>7</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

d. Traceability, component LAT, enclosure LAT and RLAT (if specifically requested on the purchase order).

5.6 Discrepant Material. All MRB authority resides with the procuring activity.

5.7 Failure Analysis. Any catastrophic failure (no clocking, no current) at Post Burn-In or after will be evaluated for root cause. The customer will be notified after occurrence and upon completion of the evaluation.

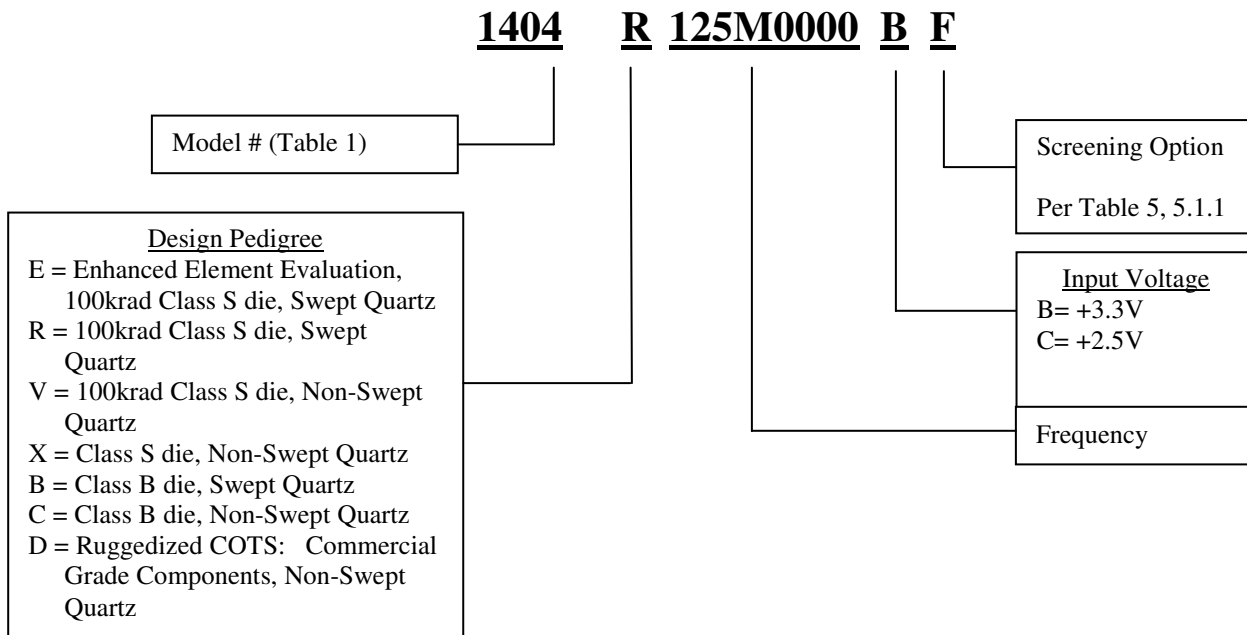
6. PREPARATION FOR DELIVERY

6.1 Packaging. Devices will be packaged in a manner that prevents handling and transit damage during shipping. Devices will be handled in accordance with MIL-STD-1686 for Class 1 devices.

7. ORDERING INFORMATION

7.1 Ordering Part Number. The ordering part number is made up of an alphanumeric series of 15 characters. Design-affected product options, identified by the parenthetic letter on the Optional Parameters list (§ 5.2a and b), are included within the device part number.

The Part Number breakdown is described as:



7.1.1 Model Number. The device model number is the four (4) digit number assigned to a corresponding package and output combination per Table 1.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>8</b>
------------------	--------------------------------	----------------------------	--------------------------------------	-----------------------------	------------------	-------------------



7.1.2 Design Pedigree. Class S variants correspond to either letter “E”, “R”, “V” or “X” and are described in paragraph 5.2a. Class B variants correspond to either letter “B” or “C” and are described in paragraph 5.2a. Ruggedized COTS, using commercial grade components, corresponds to letter “D”.

7.1.2.1 Input Voltage. Voltage is the 14<sup>th</sup> character, letter “B” representing +3.3V.

7.1.3 Output Frequency. The nominal output frequency is expressed in the format as specified in MIL-PRF-55310 utilizing eight (8) characters.

7.1.4 Screening Options. The 15<sup>th</sup> character is the Screening Option (letter A thru G or X) selected from Table 5.


7.2 Optional Design, Test and Data Parameters. Test and documentation requirements above that of the standard high reliability model shall be specified by separate purchase order line items (as listed in ¶ 5.2c thru p).

HI-REL STANDARD MODEL #	PACKAGE	OUTPUT	PIN I/O			MECHANICAL OUTLINE
			Vcc	Out	Gnd/Case	
1403	16 Lead Flatpack	ACMOS	8	10	9	FIGURE 3
1404	20 Lead Flatpack	ACMOS	13, 20	11	10	FIGURE 1
1419 <u>2/</u>	16 Lead Flatpack	ACMOS	8	10	9	FIGURE 4
1420 <u>2/</u>	20 Lead Flatpack	ACMOS	13, 20	11	10	FIGURE 2

1/. All unassigned pins have no internal connections or ties.

2/. Model 1419 and 1420 are lead formed versions of Model 1403 and 1404. See Appendix A for the recommended land patterns.

**TABLE 1 - Item Identification and Package Outline**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>9</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

Frequency Range: 12MHz to 160MHz <u>1/</u>					
Temperature Range: -55°C to +125°C					
Frequency Tolerance, Initial Accuracy @ +23°C: ±15 ppm max.					
Frequency-Temperature Stability from +23°C ref.: ±50 ppm max.					
Frequency-Voltage Tolerance: ±4 ppm max. (Vcc =3.3V±10%), (Vcc =2.5V±5%)					
Frequency Aging: ±1.5 ppm max. 1 <sup>st</sup> 30 days, ±5 ppm max. Year 1, ±2 ppm max. Year 2+					
Start-up Time: 10.0 ms max. <u>2/</u>					
Frequency Range (MHz)	Current (mA) (max. no load) 2.625V	Current (mA) (max. no load) 3.63V	Rise / Fall Times (ns max.) <u>2/</u>	Duty Cycle (%) <u>2/</u>	Load
12 - 40	12	20	5	40 to 60	10KΩ    15 pF
>40 - 65	15	26	5	40 to 60	10KΩ    15 pF
>65 - 100	20	33	3	40 to 60	10KΩ    15 pF
>100 – 126	25	40	3	40 to 60	10KΩ    15 pF
>126 – 160	30	50	3	40 to 60	10KΩ    10 pF


1/. The upper frequency limit for the 1403 and 1419 is 100MHz.

2/. Waveform measurement points and logic limits are in accordance with MIL-PRF-55310.

**TABLE 2 - Electrical Performance Characteristics**

OPERATION LISTING	REQUIREMENTS AND CONDITIONS	VECTRON TEST PROCEDURE
@ all Electrical tests		
Input Current (no load)	MIL-PRF-55310, Para 4.8.5.1	GR-51681
Initial Accuracy @ Ref. Temp.	MIL-PRF-55310, Para 4.8.6	GR-51596
Output Logic Voltage Levels	MIL-PRF-55310, Para 4.8.21.3	GR-51597
Rise and Fall Times	MIL-PRF-55310, Para 4.8.22	GR-51599
Duty Cycle	MIL-PRF-55310, Para 4.8.23	GR-51601
@ Post Burn-In Electrical only		
Overvoltage Survivability	MIL-PRF-55310, Para 4.8.4	GR-37269
Initial Freq. – Temp. Accuracy	MIL-PRF-55310, Para 4.8.10.1	GR-51602
Freq. – Voltage Tolerance	MIL-PRF-55310, Para 4.8.14	GR-51602
Start-up Time (fast/slow start)	MIL-PRF-55310, Para 4.8.29	GR-61352

**TABLE 3 - Electrical Test Parameters**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>10</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------


Model #	Thermal Resistance Junction to Case $\theta_{jc}$ ( $^{\circ}\text{C} / \text{W}$ )	$\Delta$ Junction Temp. $T_j$ ( $^{\circ}\text{C}$ @ max. $I_{cc}$ )	Typical Weight (Grams)
1403/1419	11.35	2.06	1.5
1404/1420	11.35	2.06	3.0

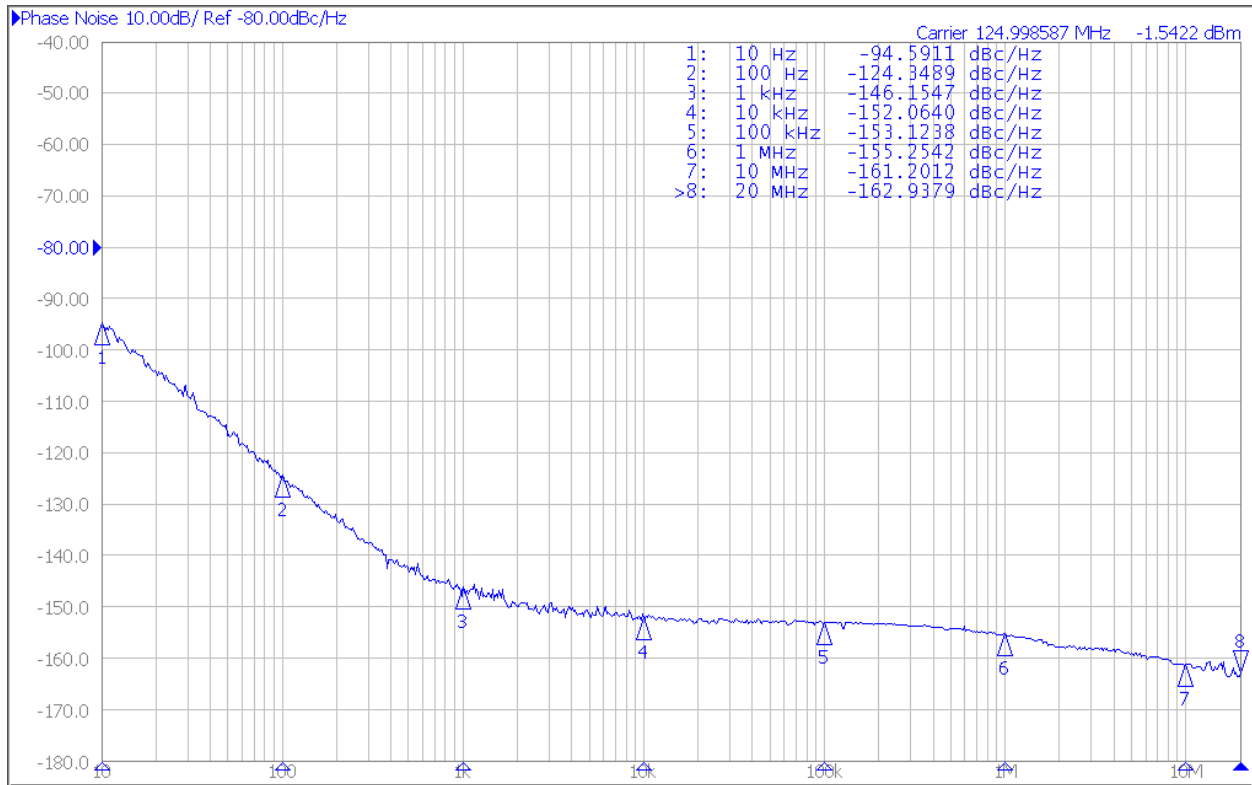
Note. The maximum current and voltage from Table 2 is used to calculate the worst case  $\Delta$  junction temperature.

**TABLE 4 - Thermal Characteristics and Weight**

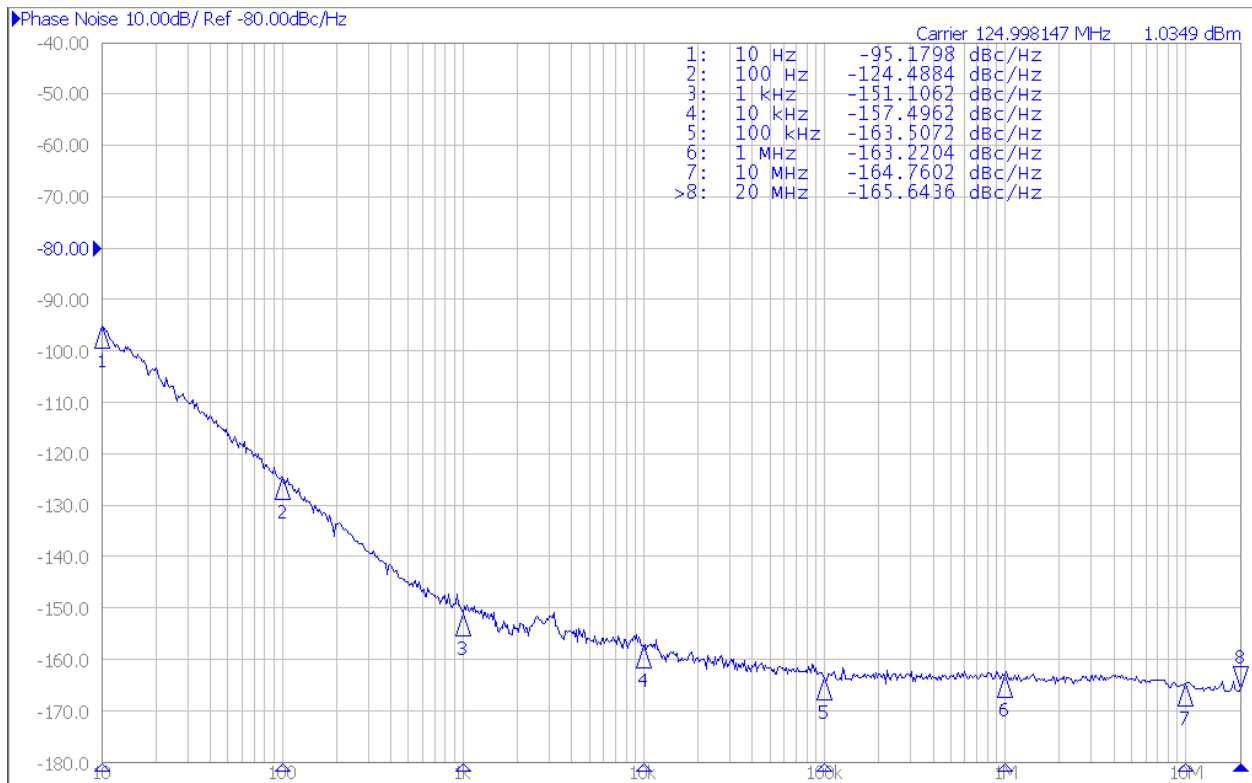
Frequency Range (MHz)	Period Jitter 1 sigma (ps)	Period Jitter pk-pk (ps)	Phase Jitter 12kHz -20MHz (ps)
12 to 40	10	85	0.33
>40 to 80	8	70	0.25
>80 to 100	6	45	0.14
>100 to 126	5	40	0.14
>126 to 160	4	35	0.14

**TABLE 4a – Typical Jitter Performance**


SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>11</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

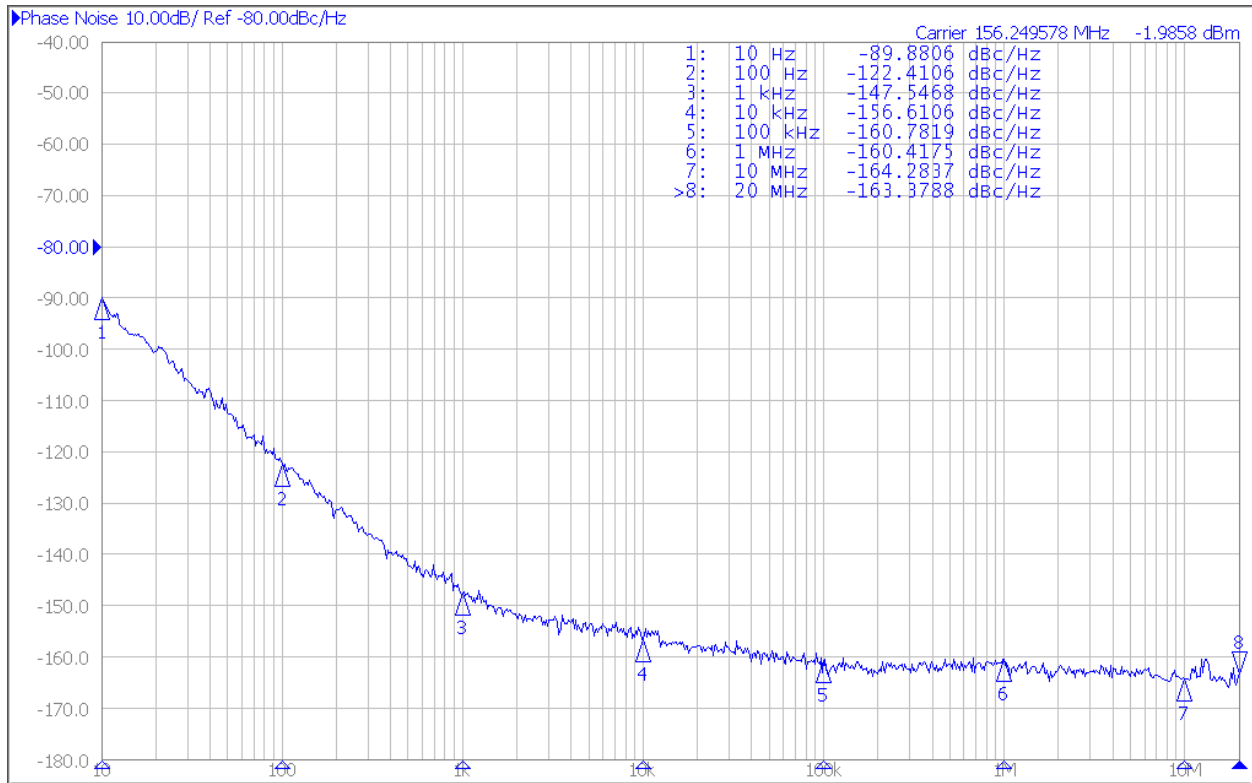


**TABLE 4b** – Typical Phase Noise Performance at 125 MHz, 2.5V

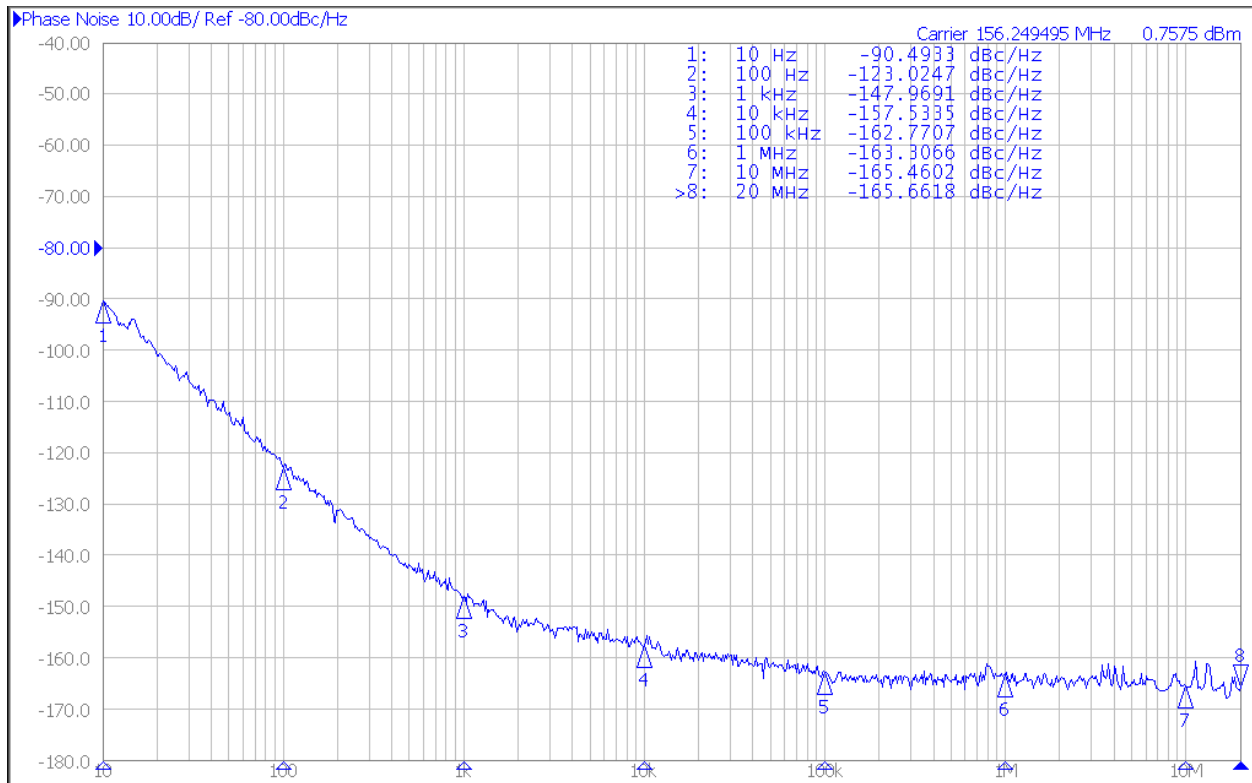


**TABLE 4c** – Typical Phase Noise Performance at 125 MHz, 3.3V


SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>12</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



**TABLE 4d** – Typical Phase Noise Performance at 156.25 MHz, 2.5V



**TABLE 4e** – Typical Phase Noise Performance at 156.25 MHz, 3.3V

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>13</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

OPN. NO.	OPERATION LISTING	REQUIREMENTS AND CONDITIONS	Option A	Option B	Option C	Option D	Option E	Option F	Option G	Option X
	<b>SCREENING</b>	MIL Class Similarity	K	B-	S-	K+	B	S		EM
			100%	100%	100%	100%	100%	100%	100%	100%
1	Non-Destruct Bond Pull	MIL-STD-883, Meth 2023	X	NR	X	X	NR	X	NR	NR
2	Internal Visual	MIL-STD-883, Meth 2017 Class K, Meth 2032 Class K	X	X	X	X	X	X	X	X
3	Stabilization (Vacuum) Bake	MIL-STD-883, Meth 1008, Cond C, 150°C	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 24 hrs.	X 24 hrs.
4	Thermal Shock	MIL-STD-883, Meth 1011, Cond A	NR	NR	X	NR	NR	X	NR	NR
5	Temperature Cycle	MIL-STD-883, Meth 1010, Cond. B, 10 cycles min.	X	X	X	X	X	X	X	NR
6	Constant Acceleration	MIL-STD-883, Meth 2001, Cond A, Y1 plane only, 5000 g's	X	X	X	X	X	X	X	NR
7	Particle Impact Noise Detection	MIL-STD-883, Meth 2020, Cond B	X	X	X	X	X	X	NR	X
8	Electrical Testing, Pre Burn-In	Perform tests in Table 3. Nominal Vcc, nominal temperature	X	X	X	X	X	X	X	X
9	1 <sup>st</sup> Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	NR
10	Electrical Testing, Intermediate	Perform tests in Table 3. Nominal Vcc, nominal temperature	X	NR	NR	X	NR	NR	NR	NR
11	2 <sup>nd</sup> Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	NR	NR	X 160 hrs.	NR	NR	NR	NR
12	Freq-Temp Slew Test	Operating temp. range, frequency plotted at 1.0°C steps	AR	AR	AR	AR	AR	AR	NR	NR
13	Electrical Testing, Post Burn-In (Group A)	Perform tests in Table 3. Nominal Vcc & extremes, nominal temperature & extremes	X	X	X	X	X	X	X nom. Vcc	NR
14	Seal: Fine Leak	MIL-STD-202, Meth 112, Cond C 5 x 10 <sup>-8</sup> atm cc/sec max	X	X	X	X	X	X	X	X
15	Seal: Gross Leak	MIL-STD-202, Meth 112, Cond D	X	X	X	X	X	X	X	X
16	Radiographic Inspection	MIL-STD-883, Meth 2012	X	AR	AR	X	AR	X	NR	NR
17	Solderability	MIL-STD-883, Meth 2003	<u>1/</u>	<u>1/</u>	<u>1/</u>	<u>1/</u>	<u>1/</u>	<u>1/</u>	<u>1/</u>	NR
18	External Visual & Mechanical	MIL-STD-883, Meth 2009	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>	X <u>2/</u>
19	Aging, 30 Day <u>3/</u> (M55310 Group B)	MIL-PRF-55310, para. 4.8.35.1	NR	NR	NR	X	13 pcs.	X	NR	NR

LEGEND: X = Required, NR = Not Required, AR = As Required

**TABLE 5 - Test Matrix**

1/ Performed at package LAT. Include LAT data sheet.


2/ When specified, RGA samples will be removed from the lot after completion of this operation. Use of Screening failures requires customer concurrence.

3/ By customer request, the Aging test may be terminated after 15 days if the measured aging rate is less than one-half the specified aging rate, as described in paragraph 4.3.4.1 herein. See the customer PO.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>14</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------


Subgroup	Class K	Test	Mil-STD-750		Quantity (accept number)	Mil-PRF-38534 Reference Paragraph
			Method	Condition		
1	X	Element Electrical A. May perform at wafer level B. All failures shall be removed from the lot		Perform at room ambient	100%	C.3.3.1
2	X	Element Visual	2069, 2070, 2072, 2073		100%	C.3.3.2
3	X	Internal Visual	2069, 2070, 2072, 2073, 2074		10(0) or 22(0) (Notes 1 & 2)	C.3.3.3 C.3.3.4.2
4	X	Temperature Cycling	1051	C	10(0) 22(0) (See Notes 1 & 2)	C.3.3.3
	X	Surge Current (when applicable)	4066	A or B as specified		
	X	Constant Acceleration	2006  2001	Y1 direction 20,000 G / 10,000 G for Pd ≥ 10W		
	X	Interim Electrical				C.3.3.4.3
	X	High Temperature Reverse Bias (HTRB)	1039 1042 1038	A B A		
	X	Interim Electrical & Delta		Complete Within 16 hrs of HTRB completion		
	X	Burn-In 240 hours	1039, 1042 1038 1040	B A B		
	X	Post Burn-In Electrical				C.3.3.4.3
	X	Steady State Life 1000 hours	1026 1037 1042 1048			
	X	Final Electrical				C.3.3.4.3
5	X	Wire Bond Evaluation	2011		10(0) wires or 20(1) wires	C.3.3.3 C.3.3.5
6	X	SEM	2018 2077		See method 2018 or 2077 & Note 2	C.3.3.6

**TABLE 6 - SEMICONDUCTOR ENHANCED ELEMENT EVALUATION**

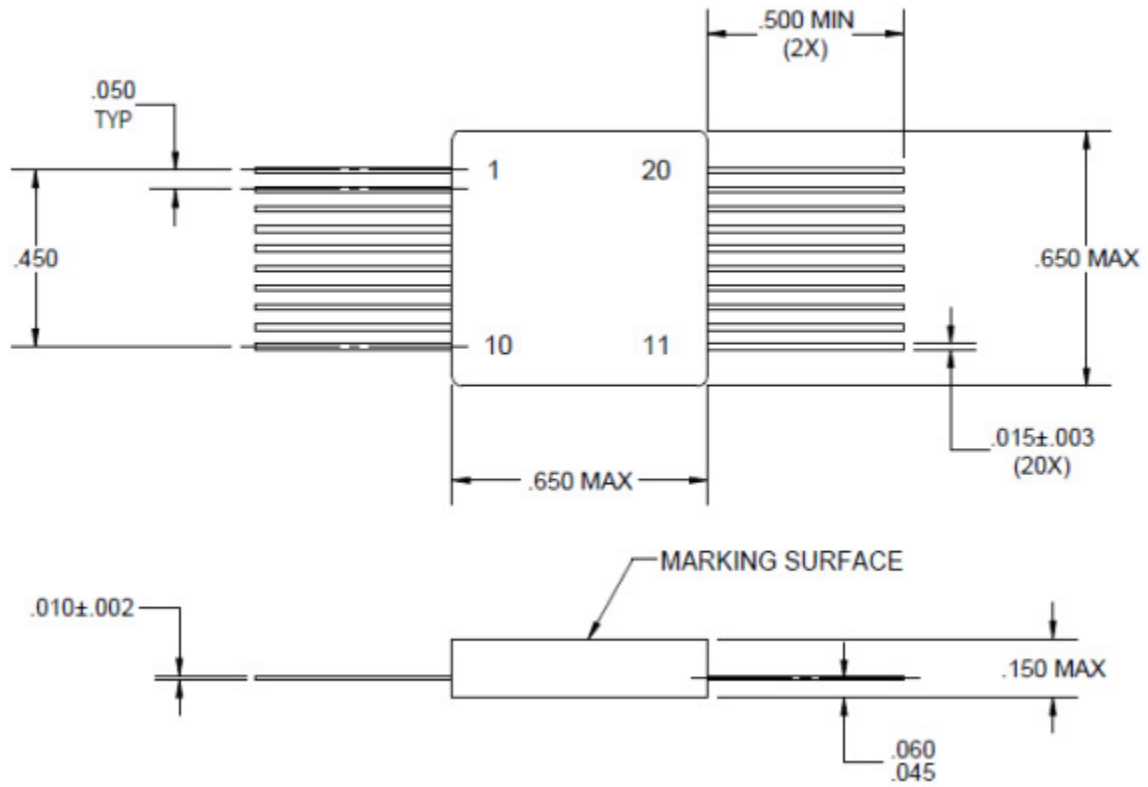
SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>15</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

Parts Type	Test	Requirement Paragraph	Sample size	Allowable Reject(s)
Ceramic Capacitors				
M55681 FRL S or M123 (chips)	N/A	N/A	N/A	N/A
Resistors				
M55342 FRL R or S	N/A	N/A	N/A	N/A
Inductors (See Paragraph 4.1.2)				
Custom closed magnetics	Group A	Mil-Std-981	Mil-Std-981	Mil-Std-981
	Group B	Mil-Std-981	Mil-Std-981	Mil-Std-981
<p>Magnetics, Closed Construction Leaded and Surface Mount (transformers, inductors, coils) (Note: Stacking magnetics shall be qualified and the effects of the long term performance of the hybrids verified. When stacking magnetics, a repeat of the thermal cycling plus electrical measurements as specified in Group A of Mil-Std-981. Design, workmanship and materials/processes shall conform to MIL-STD-981 requirements).</p> <p>Magnetics, Open Construction are unencapsulated and unpotted self-leaded parts consisting of magnet wire wound around a magnetic core. These parts are fully visually inspectable. Open construction magnetics shall be subjected to 100% electrical measurements and visual inspection per MIL-STD-981.</p>				

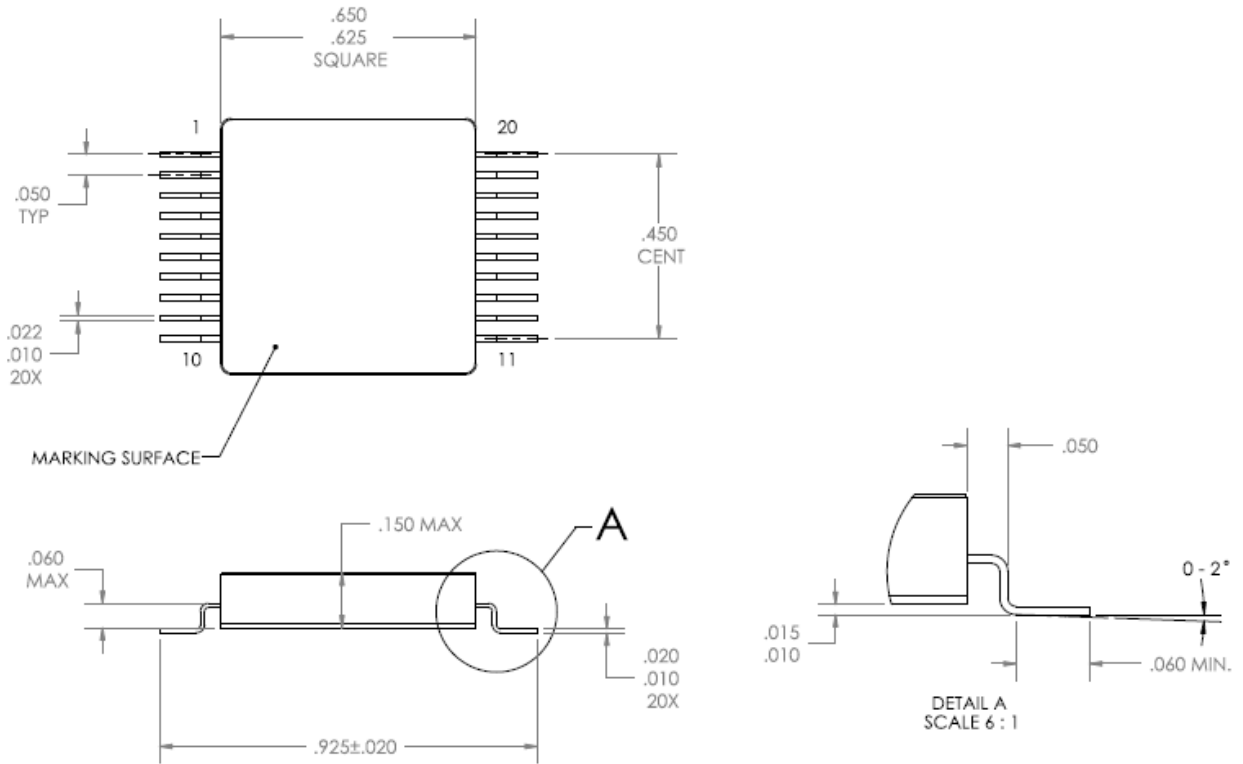
**TABLE 7: PASSIVE COMPONENT ENHANCED ELEMENT EVALUATION**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>16</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



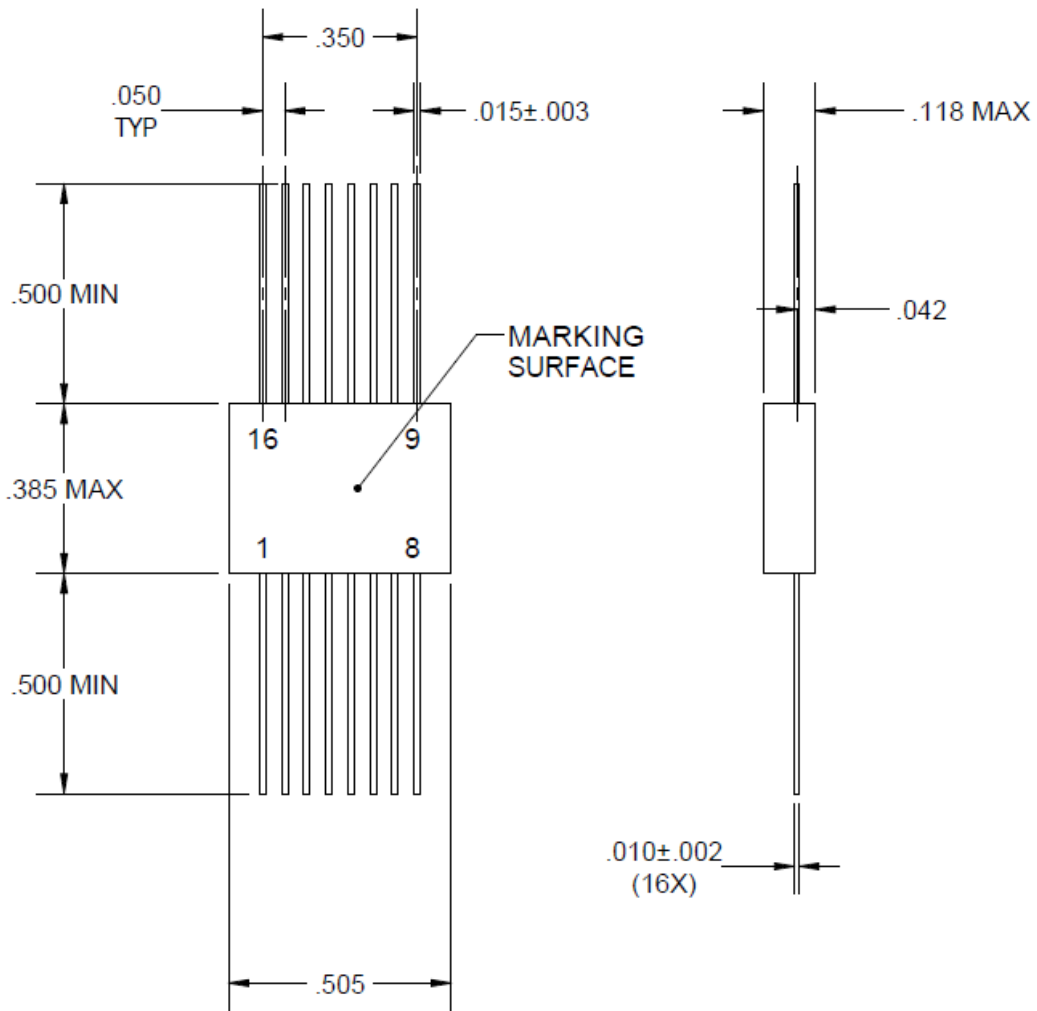


**FIGURE 1**  
Model 1404 Package Outline




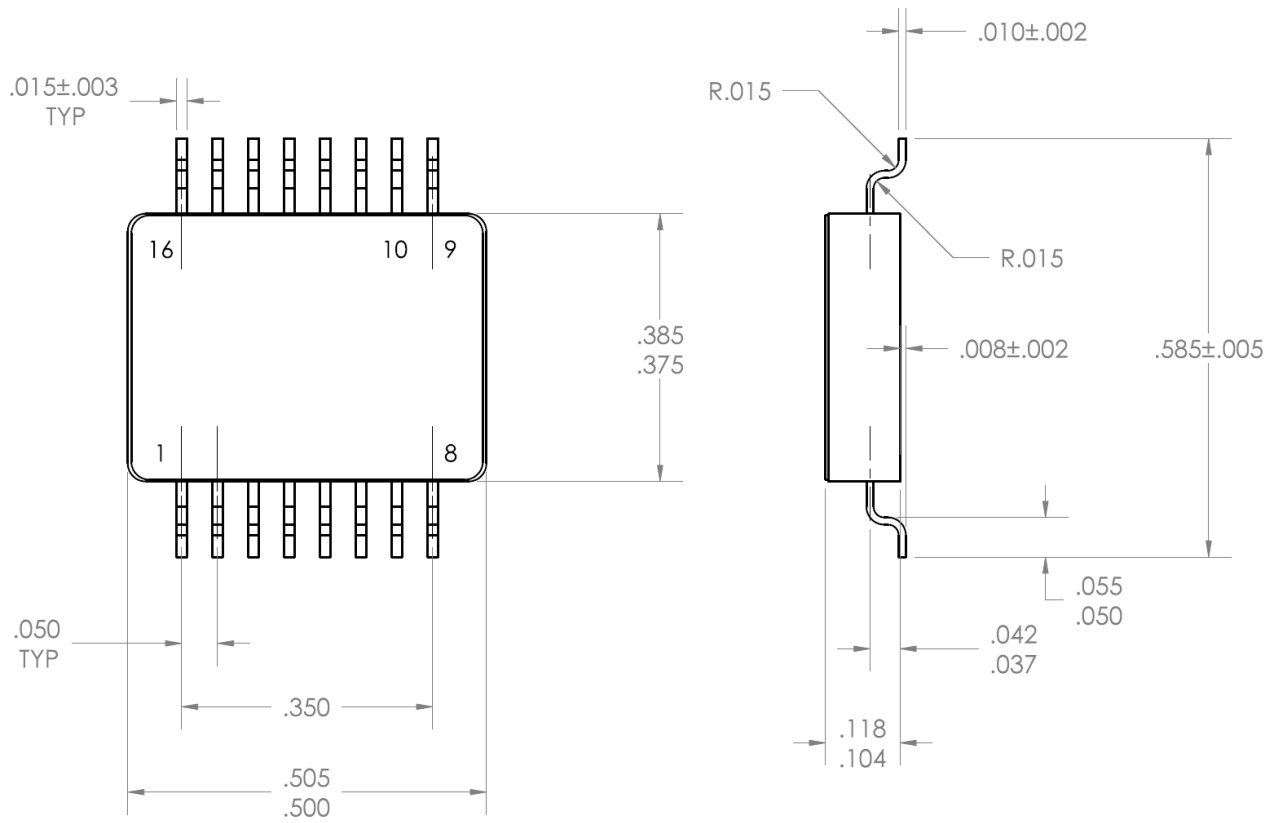
**FIGURE 2**  
Model 1420 Package Outline

SIZE	CODE IDENT NO.	THIRD ANGLE PROJECTION	UNSPECIFIED TOLERANCES	DWG NO.	REV.	SHEET
A	00136		N/A	DOC204900	D	17




**FIGURE 3**  
Model 1403 Package Outline

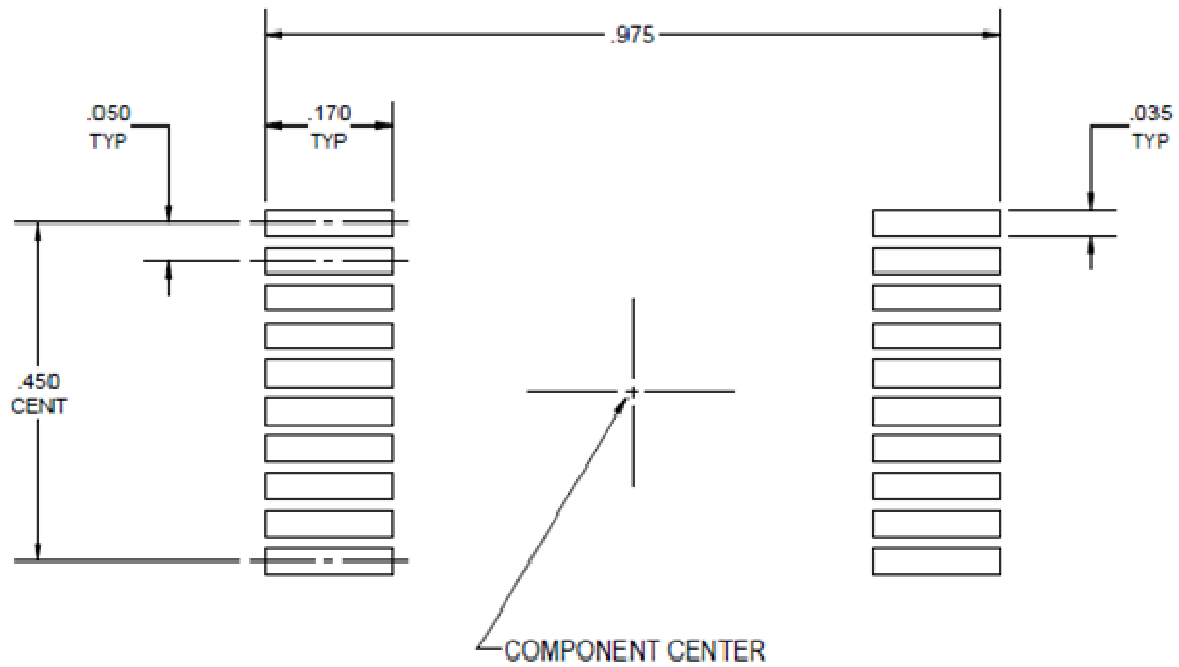
SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>18</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



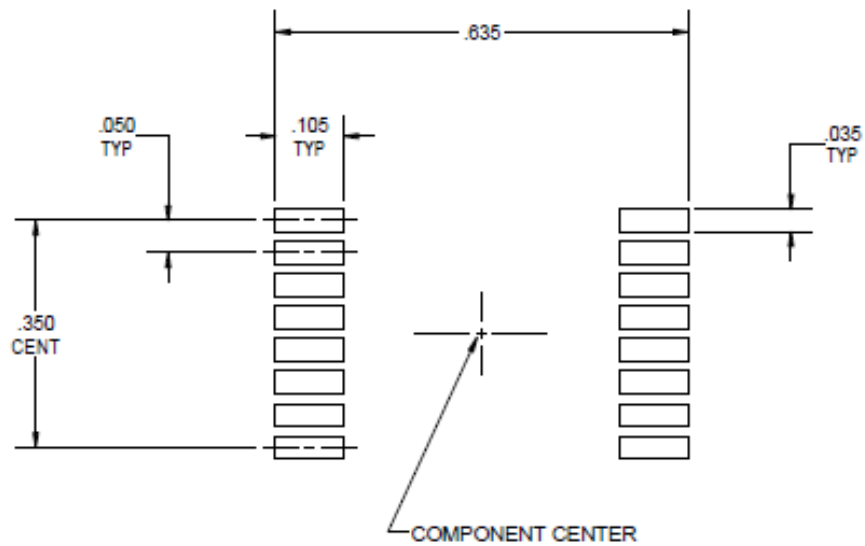
**FIGURE 4**  
Model 1419 Package Outline

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC204900</b>	REV. <b>D</b>	SHEET <b>19</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

**APPENDIX A**  
Recommended Land Patterns



Model 1420



Model 1419

SIZE	CODE IDENT NO.	THIRD ANGLE PROJECTION	UNSPECIFIED TOLERANCES	DWG NO.	REV.	SHEET
A	00136		N/A	DOC204900	D	20