
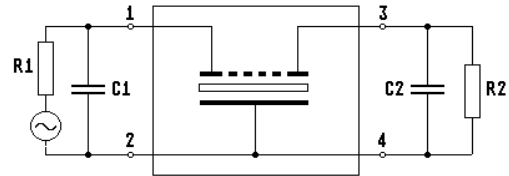
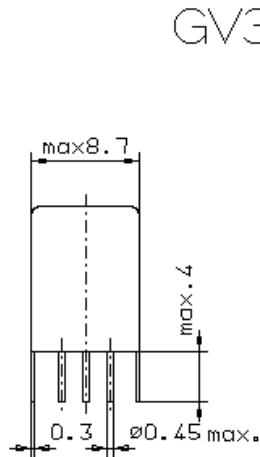


Specification for monolithic crystal filter:

MQF 21.4-0560/04

1. General

1.1. Package:

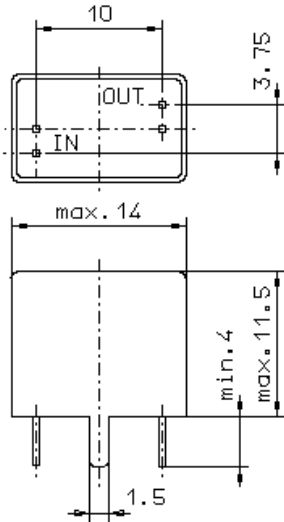

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 21.4-0560/04 |
| 1.3. Number of poles: | 8 |
| 1.4. Operating temperature range: | -20°C to +70°C |
| 1.5. Storage temperature range: | -30°C to +85°C |

2. Electric values

- | | |
|---------------------------------------|----------|
| 2.1. Nominal centre frequency f_0 : | 21.4 MHz |
|---------------------------------------|----------|

2.2. Pass band

- | | |
|---|------------------------------------|
| 2.2.1. Bandwidth between 6 dB - frequencies: | $\geq f_0 \pm 2.8$ kHz |
| 2.2.2. Ripple: | ≤ 2.0 dB at $f_0 \pm 2.0$ kHz |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 6.0 dB |

2.3. Stop band

- | | |
|------------------------------|--------------|
| 2.3.1. $f_0 \pm 7.3$ kHz | ≥ 60 dB |
| 2.3.2. Alternate attenuation | ≥ 80 dB |

- | | |
|--|------------------------|
| 2.4. Terminating impedance (input and output): | $700 \Omega // 6.8$ pF |
|--|------------------------|

- | | |
|-------------|---|
| 3. Marking: | manufacturer, date code
21.4-0560/04 |
|-------------|---|

- | | |
|----------------------------|---|
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |
|----------------------------|---|

Edited by: _____ date: _____ name: _____