

Measurement condition

Ambient temperature T_A :	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	109 Ω -11.1 pF	
Output:	90 Ω -11.1 pF	

Characteristics

Remark:

The reference level for the relative attenuation a_{rel} of the TFS 140BG is the minimum of the pass band attenuation. This value is defined as the insertion loss a_e . The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed at 140 MHz without any tolerance. The values of relative attenuation a_{rel} are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

D a t a	typ. value		tolerance / limit		
Insertion loss (reference level)	a_e	28	max.	30	dB
Nominal frequency	f_N			140	MHz
Centre frequency ***	f_C	140	MHz	\pm 0.15	MHz
Passband	PB		f_N	\pm 15	MHz
Bandwidth					
0.8 dB		33.2	min.	30	MHz
3 dB		33.9	min.	32	MHz
40 dB		36	max.	38	MHz
Amplitude ripple in PB		0.23	max.	0.8	dB
Amplitude ripple in PB (any 2.5MHz)		0.18	max.	0.3	dB
Amplitude ripple in PB (any 5MHz)		0.18	max.	0.4	dB
Amplitude ripple in PB (any 10MHz)		0.18	max.	0.5	dB
Amplitude ripple in $f_N \pm 16$MHz ***		0.23	max.	0.8	dB
Relative attenuation	a_{rel}				
f_N	... $f_N \pm$ 15	MHz	0.23	max.	0.8 dB
$f_N \pm$ 15	MHz ... $f_N \pm$ 16	MHz	0.23	max.	3 dB
$f_N \pm$ 19	MHz ... $f_N \pm$ 50	MHz	45	min.	40 dB
Phase ripple in PB		1.2	max.	2	°p-p
Phase ripple in PB (any 2.5MHz)		0.83	max.	1.5	°p-p
Phase ripple in PB (any 5MHz)		1.02	max.	1.75	°p-p
Phase ripple in PB (any 10MHz)		1.04	max.	1.75	°p-p
Phase ripple in $f_N \pm 16$MHz ***		1.2	max.	2	°p-p
Group delay ripple in PB		20	max.	70	ns
Return loss in PB		12	min.	9	dB
IIP3 ****		-	min.	30	dBm
Operating temperature range	OTR			- 40 °C ... + 85°C	
Storage temperature range				- 55 °C ... + 125°C	
Temperature coefficient of frequency	TC_f **	-80	ppm/K		-

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

***) $\Delta f = TC_f(T - T_A)f_N$

****) At room temperature only.

*****) $f_{in1} = 139$ MHz; $f_{in2} = 141$ MHz; $P_{in} = 0$ dBm; $f_{measurement1} = 137$ MHz; $f_{measurement2} = 143$ MHz.



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

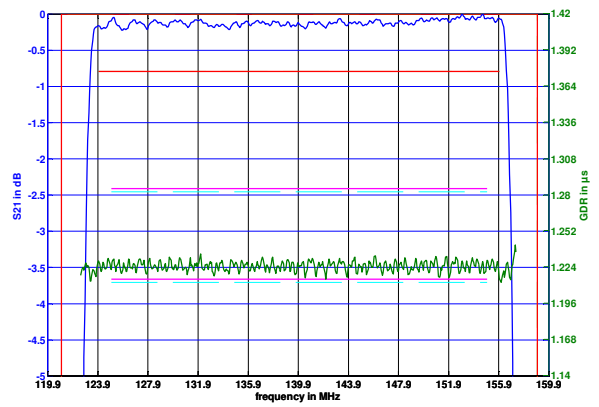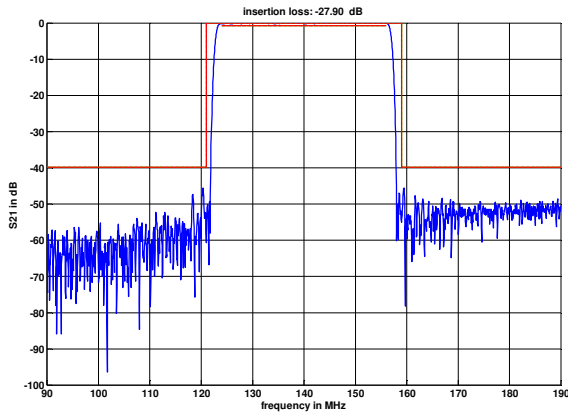

Construction and pin connection


(All dimensions in mm)

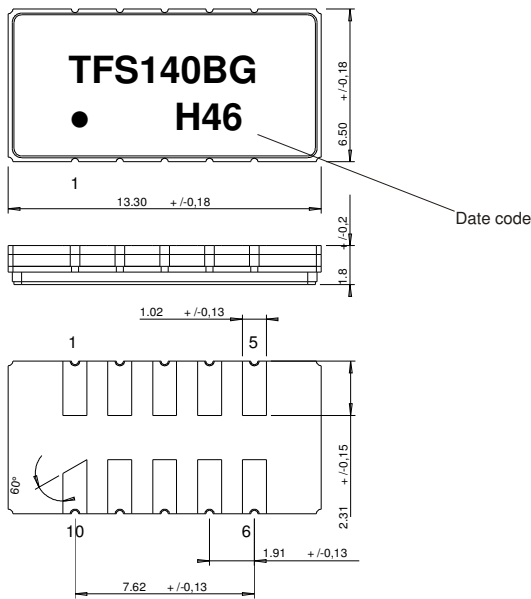

- 1 Ground
- 2 Ground
- 3 Ground
- 4 Ground
- 5 Output
- 6 Ground
- 7 Ground
- 8 Ground
- 9 Ground
- 10 Input

Date code: Year + week
 H 2016
 J 2017
 K 2018
 ...

50 Ω Test circuit

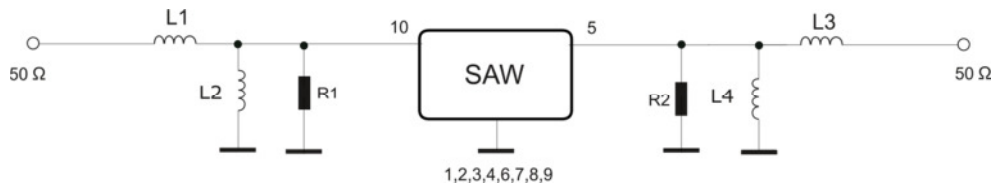

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500 g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 60068 T2 - 27
2. Vibration: 10 Hz to 2000 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 60068 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 60068 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. SAW devices are Electrostatic Discharge (ESD) sensitive devices.


This filter is RoHS compliant (2011/65/EU)

Packing


Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters per reel:	1700
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

- Tape (all dimensions in mm)**
- W : 24.00 +0.30/-0.10
 - Po : 4.00 ±0.1
 - Do : 1.50 +0.1/0
 - E : 1.75 ±0.10
 - F : 11.50 ±0.10
 - G(min) : 0.60
 - P2 : 2.00 ±0.1
 - P1 : 12.00 ±0.1
 - D1(min) : 1.50
 - Ao : 7.00 ±0.10
 - Bo : 13.80 ±0.10
 - Ct : 21.00 ±0.1
 - Ko : 2.10 ±0.10
 - t : 0.30 ±0.05

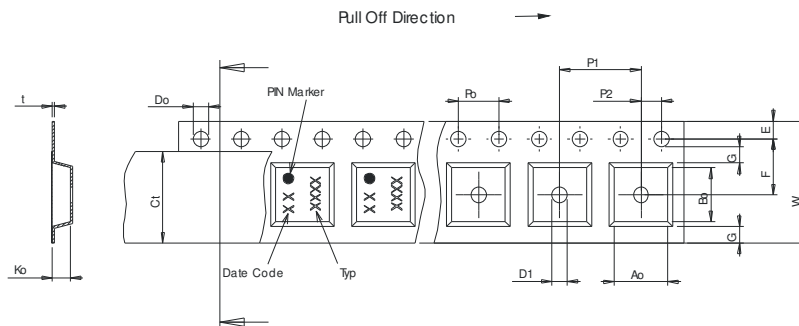

- Reel (all dimensions in mm)**
- A : 330 or 180
 - W1 : 24.4 +2/-0
 - W2(max) : 30.40
 - N(min) : 60.00
 - C : 13.0 +0.5/-0.2

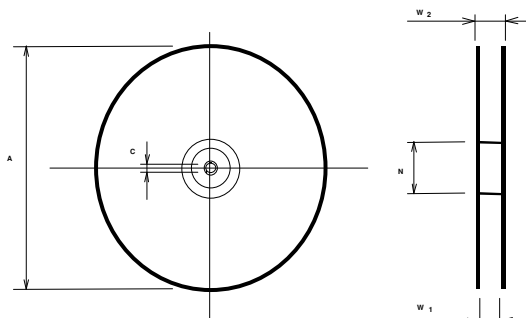

The minimum bending radius is 45 mm.


Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30 °C to 217 °C)	less than 3 °C / second
> 100 °C	between 300 and 600 seconds
> 150 °C	between 240 and 500 seconds
> 217 °C	between 30 and 150 seconds
Peak temperature	max. 260 °C
Time within 5 °C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50 °C)	less than 6 °C / second
Time from 30 °C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile

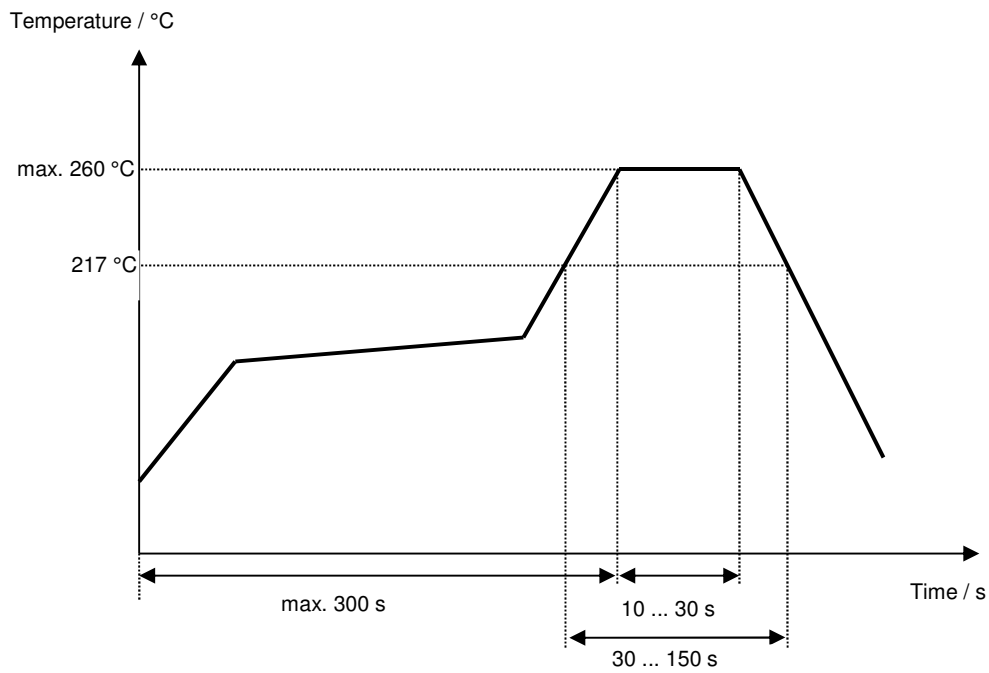

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

History

Version	Reason of Changes	Name	Date
1.0	Generation of development specification	TCUK	04.02.2014
1.1	Customer request to add centre frequency tolerance (at RT) & typ value for TC_f .	TCUK	06.02.2014
1.2	Correct typo error on 40dB relative atten. level from $\pm 25,5$ to ± 19.0 MHz	TCUK	11.08.2014
2.0	Customer agreed changes, loss to 30dB max and now use 13x6 10-pad pkg.	TCUK	26.01.2015
2.1	Change to Filter Spec. Add terminating impedance, typical values, & plots	TCUK	13.03.2015
2.2	Added IIP3 tone & test frequencies, & corrected typo in IIP3 units & vibration stability section.	TCUK	24.05.2015
2.3	Re-worked IIP3 statement.	TCUK	25.05.2015
3.0	Change tape & reel dimensions Update header and footer sections Update data section Update 50 Ω Test circuit scheme Update stability characteristics, reliability	Laifi	08.11.2016