

Measurement condition

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	34.7 Ω	- 68.2 pF
Output:	34.7 Ω	- 68.2 pF

Characteristics

Remark:

The reference level for the relative attenuation a_{rel} of the TFS 150AN is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency TC_f is valid for both the reference frequency f_c and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is not included in the production tolerance scheme.

D a t a		typ. value	tolerance / limit
Insertion loss (reference level)	a_e	22 dB	max. 27 dB
Nominal frequency	f_N	-	150.0 MHz
Centre frequency at ambient temperature	f_c	150.0 MHz	± 0.15 MHz
Passband	PB		f_c ± 4.0 MHz
Pass band ripple	p-p	0.6 dB	max. 1.0 dB
Bandwidth	BW		
3 dB		10.06 MHz	min. 10.03 MHz
20 dB		10.77 MHz	max. 10.80 MHz
30 dB		10.95 MHz	max. 11.25 MHz
35 dB		11.01 MHz	max. 12.00 MHz
Relative attenuation	a_{rel}		
f_c ... f_c ± 4.00 MHz		0.6 dB	max. 1.0 dB
f_c ± 4.00 MHz ... f_c ± 5.015 MHz		2.8 dB	max. 3.0 dB
f_c ± 5.40 MHz ... f_c ± 5.625 MHz		21 dB	min. 20 dB
f_c ± 5.625 MHz ... f_c ± 6.00 MHz		41 dB	min. 30 dB
f_c ± 6.00 MHz ... f_c ± 10.0 MHz		41 dB	min. 35 dB
f_c ± 10.0 MHz ... f_c ± 50.0 MHz		48 dB	min. 45 dB
Group delay	mean value in PB	2.5 μs	max. 4 μs
Group delay ripple within PB		103 ns	max. 200 ns
Return loss within PB		16 dB	min. 8 dB
Operating temperature range	OTR	-	0 °C ... + 85 °C
Storage temperature range		-	- 40 °C ... + 85 °C
Temperature coefficient of frequency	TC_f **	- 18 ppm/K	-

*) The terminating impedances depend on parasites and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0) \times f_{T0}(\text{MHz})$



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

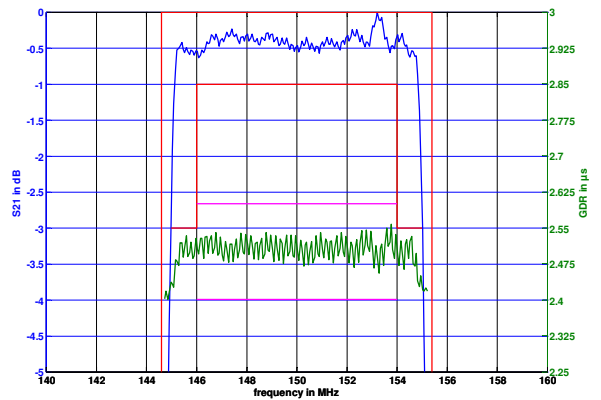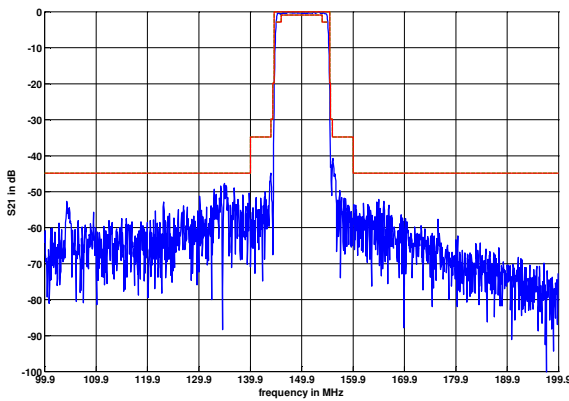

Construction and pin connection


(All dimensions in mm)

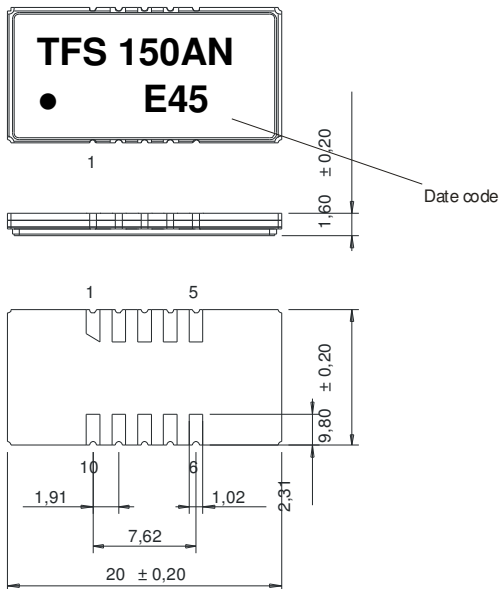

- 1 Ground
- 2 Ground
- 3 Ground
- 4 Output RF Return
- 5 Output
- 6 Ground
- 7 Ground
- 8 Ground
- 9 Input RF Return
- 10 Input

Date code: Year + week
 E 2014
 F 2015
 G 2016
 ...

50 Ohm Test circuit

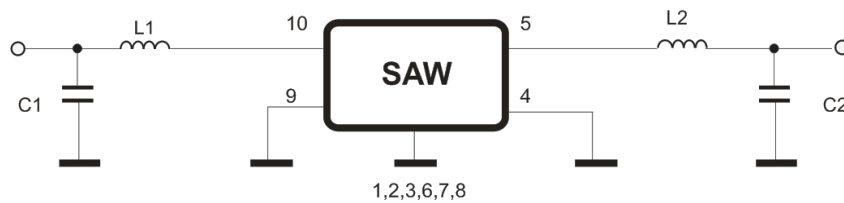

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. ESD ANSI/ESD S20.20-1999, class 1A for HBM


This filter is RoHS compliant (2011/65/EU)

Packing

- Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;
- max. pieces of filters per reel: min. 300 mm
reel of empty components at start: min. 500 mm
reel of empty components at start including leader: min. 300 mm
trailer:


Tape (all dimensions in mm)

W	:32,00
Po	:4,00 ± 0,1
Do	:1,50 +0,1/-0
E	:1,75 ± 0,1
F	:14,20 ± 0,1
G(min)	:
P2	:2,00 ± 0,1
P1	:16,00 ± 0,1
D1(min)	:2,00
Ao	:10,25 ± 0,1
Bo	:20,45
Ct	:25,5

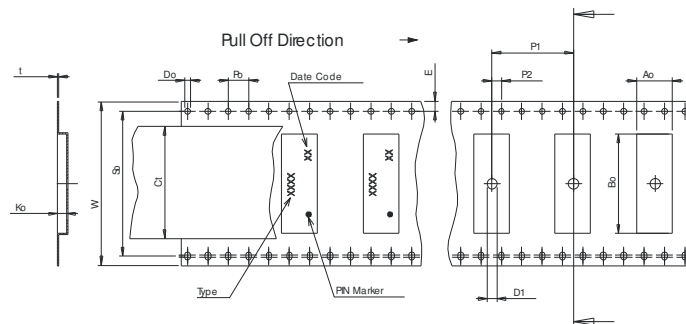

Reel (all dimensions in mm)

A	:330
W1	:44,4 +2/-0
W2(max)	:50,4
N(min)	:100
C	:13,0 +0,5/-0,2

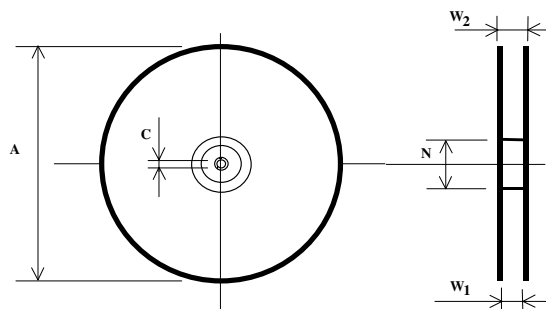


The minimum bending radius is 45 mm.

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

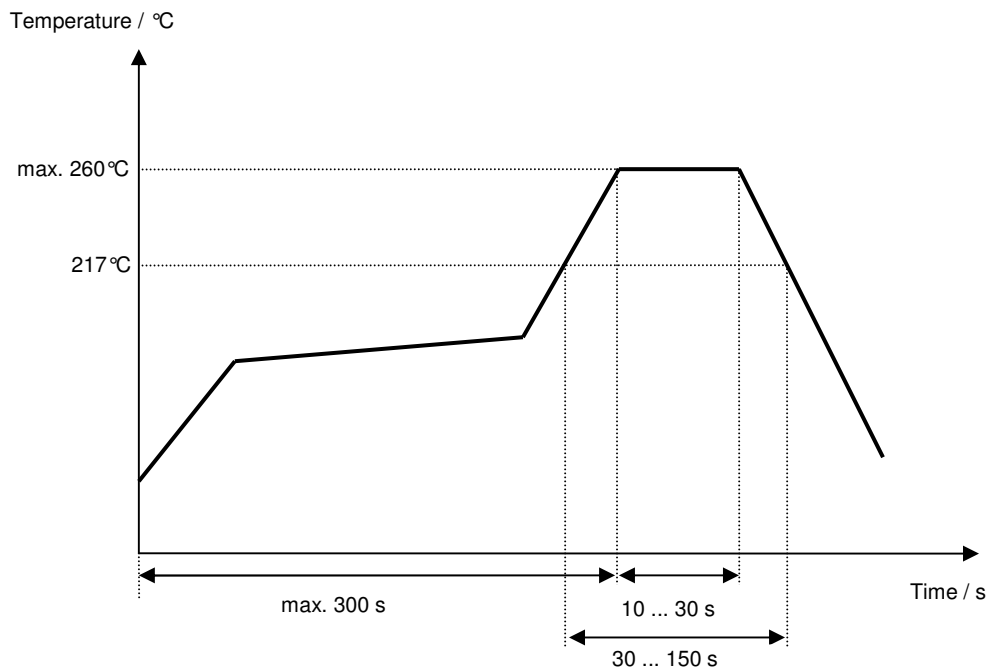Chip-mount air reflow profile

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

History

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	Jaffer	04.11.2010
1.1	- Change f_c tolerance from $\pm 0.05\text{MHz}$ to $\pm 0.15\text{MHz}$ - Add typical values and change development to filter specification	TCUK	04.03.2014
2.0	- Update to reflect T32 performance, (now customer preferred option). Also relax: - 3 dB bw min. 10.05 MHz \rightarrow 3 dB bw min. 10.03 MHz. - $f_c \pm 4.00\text{MHz} \dots f_c \pm 5.025\text{MHz}$ max. 3.0 dB \rightarrow $f_c \pm 4.00\text{MHz} \dots f_c \pm 5.015\text{MHz}$ max. 3.0 dB.	TCUK	14.05.2014

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.