


Specification for monolithic crystal filter:

MQF 10.7-3000 / 41

1. General

1.1. Package:

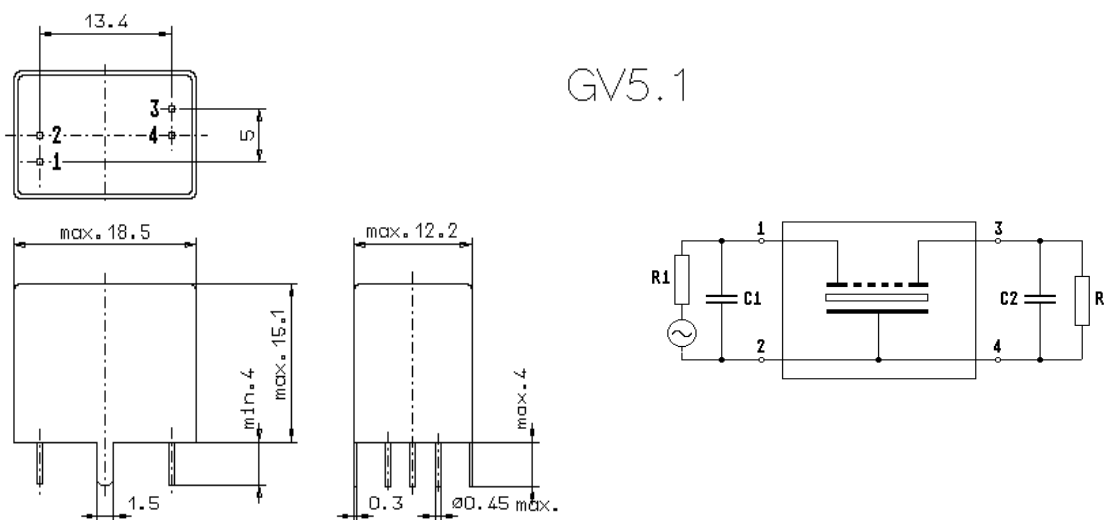

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 10.7-3000/41 |
| 1.3. Number of poles: | 8 |
| 1.4. Operating temperature range: | -40°C to +85°C |
| 1.5. Storage temperature range: | -45°C to +85°C |

2. Electric values

- | | |
|---|---|
| 2.1. Nominal centre frequency f_0 : | 10.7 MHz |
| 2.2. Pass band | |
| 2.2.1. Bandwidth between 3 dB - frequencies: | $\geq f_0 \pm 15$ kHz |
| 2.2.2. Ripple: | ≤ 2.0 dB at $f_0 \pm 12$ kHz |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 3.0 dB |
| 2.3. Stop band | |
| 2.3.1. $f_0 \pm 35$ kHz | ≥ 70 dB |
| 2.3.2. $f_0 \pm 50$ kHz | ≥ 90 dB |
| 2.3.3. $f_0 \pm 50$ kHz..... ± 300 kHz | ≥ 90 dB (except spurious) |
| 2.4. Terminating impedance (input and output): | $4000 \Omega // -1.8$ pF |
| 2.5. Maximum input power level: | +10 dBm / +30 dBm (working / non-damaged) |
| 3. Marking: | manufacturer, date code
10.7-3000/41 |
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |

Edited by: _____ date: _____ name: _____